


43寸高亮组装屏产品说明

一、高亮屏参数列表

型号/Module	G430DUE-D15
尺寸/Size	43 英寸
面板品牌/Brand	LG
分辨率/Pixels Format	1920(RGB)×1080
场频/Vsync Frequency (Hz)	60
面板类型/Panel Type	a-Si
亮度/Brightness (cd/m ²)	1500 nits
对比度/Contrast Ratio	1200:1 (Typ.)
可视角/View Angle:L-R-U-D (degree)	89/89/89/89(上/下/左/右)
显示颜色/Display Colour (bit)	16.7M (8-bit)
信号类型/Signal Type	LVDS
透光模式/Display Mode	RGB垂直条状
响应时间/Response Time:G-to-G (ms)	8ms
背光类型/Backlight Type	WLED 背光
输入电压/Backlight Voltage (V)	12.0v
功率总耗/Backlight Power Consumption (W)	38.4W
可视尺寸/Active Display Area:H x V (mm)	941.184×529.416mm (H×V)
显示尺寸/Pixel Pitch:H x V (mm)	945.7×533.866 mm (H×V)
外观尺寸/Outline Size:W x H x D (mm)	974.237×565.981 mm (H×V)

重量/Weight (Kg)	6.30/7.00Kgs
工作温度/Operating Temperature (°C)	0-50°C
储存温度/Storage Temperature (°C)	-20°C-60°C

二、外形尺寸

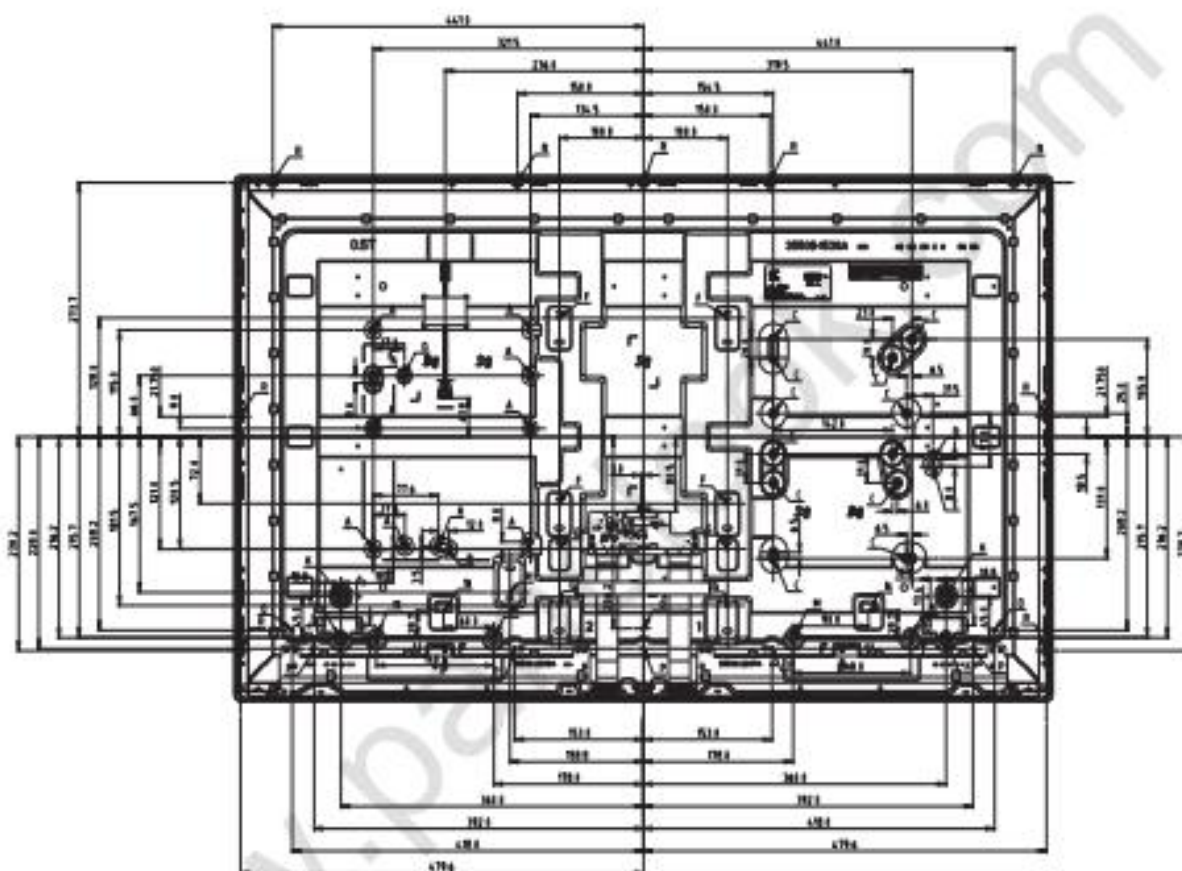

Item	QOH height	Top	Max Depth mm	Max Torque kgf.cm	Notes
A	15	M3.5	5.0	5.0	PSU
B	15	M3.5	5.0	5.0	PSU
C	15	M3.5	5.0	5.0	PSU
D	15	M3.5	5.0	5.0	PSU
E	15	M3.5	5.0	5.0	PSU
F	15	M3.5	5.0	5.0	PSU
G	15	M3.5	5.0	5.0	PSU
H	15	M3.5	5.0	5.0	PSU
I	15	M3.5	5.0	5.0	PSU
J	15	M3.5	5.0	5.0	PSU
K	15	M3.5	5.0	5.0	PSU
L	15	M3.5	5.0	5.0	PSU
M	15	M3.5	5.0	5.0	PSU
N	15	M3.5	5.0	5.0	PSU
O	15	M3.5	5.0	5.0	PSU
P	15	M3.5	5.0	5.0	PSU
Q	15	M3.5	5.0	5.0	PSU
R	15	M3.5	5.0	5.0	PSU
S	15	M3.5	5.0	5.0	PSU
T	15	M3.5	5.0	5.0	PSU
U	15	M3.5	5.0	5.0	PSU
V	15	M3.5	5.0	5.0	PSU
W	15	M3.5	5.0	5.0	PSU
X	15	M3.5	5.0	5.0	PSU
Y	15	M3.5	5.0	5.0	PSU
Z	15	M3.5	5.0	5.0	PSU

